


SCF56X-450-S2R0C008JH

Aliases (UALSCF56XS008H)

KEMET, SCF-X 3PHASE, AC Line Filters, Common Mode, 1.36 mH

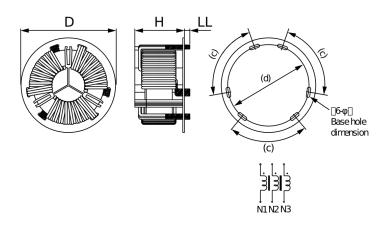

General Information	,
Series	SCF-X 3PHASE
Style	Through-Hole
Features	High Impedance, Space Saving
RoHS	Yes
Notes	Lead Spacing (S/S1) Are For Reference Only.
Miscellaneous	Temperature Rise Maximum: 70K.
Core	Nanocrystal

Specifications	
Voltage AC	500 VAC
Voltage DC	500 VDC
Inductance	1.36 mH (100 kHz)
Current	45 A
Temperature Range	-40/+130°C
DC Resistance	1.59 mOhms

Click here for the 3D model.

Dimensions		
D	80mm MAX	
н	45mm MAX	
LL	5.1mm +/-1.5mm	

Packaging Specifications	
Packaging	Tray
Packaging Quantity	18
Component Weight	370 g

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.