USB-C Adapter Metal

multicomp PRO



RoHS Compliant


Features

- Fits standard rectangular cutout.
- · Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.
- 90° or right angle rear cable entry.

Specifications

Max. Rated Current	: 3A
Max. Working Voltage	: 30V
Dielectric Withstanding Voltage	: 100V AC (min) 1 minute
Contact Resistance	: 40mΩ maximum
Insulation Resistance	: 100 MΩ minimum @100V DC
Insertion Life	: 10,000 Cycles
Power Delivery (PD) Compatible	: Yes
Materials	
Frame	: Nickel Plated Zinc Diecast
RAFT Insert	: ABS, UL94 HB
USBC Insulator	: LCP, UL94 V-0

Diagram

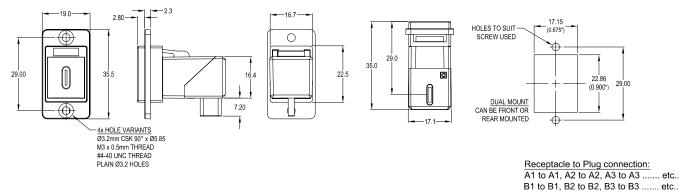

Note: Functionality is affected by cable quality, length and cable wiring configuration.

Dimensions : Millimetres

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro



Part Number Table

Description	Part Number
USB-C Adapter, F-M, R/A, Nickel Frame, CSK Holes	MP-CP30756M
USB-C Adapter, F-M, R/A, Nickel Frame, M3 Holes	MP-CP30756M3
USB-C Adapter, F-M, R/A, Black Metal Frame, CSK Holes	MP-CP30756MB
USB-C Adapter, F-M, R/A, Black Metal Frame, M3 Holes	MP-CP30756MB3

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

