


TE Internal #: 2441485-1 SMPM RF Interface, Plug, 50 Ω , Push-On, 0 – 65 GHz Operating Frequency, Cable-to-Board, Printed Circuit Board, -55 – 125 °C [-131 – 257 °F], Straight

View on TE.com >



Connectors > RF Connectors > Coax Connectors

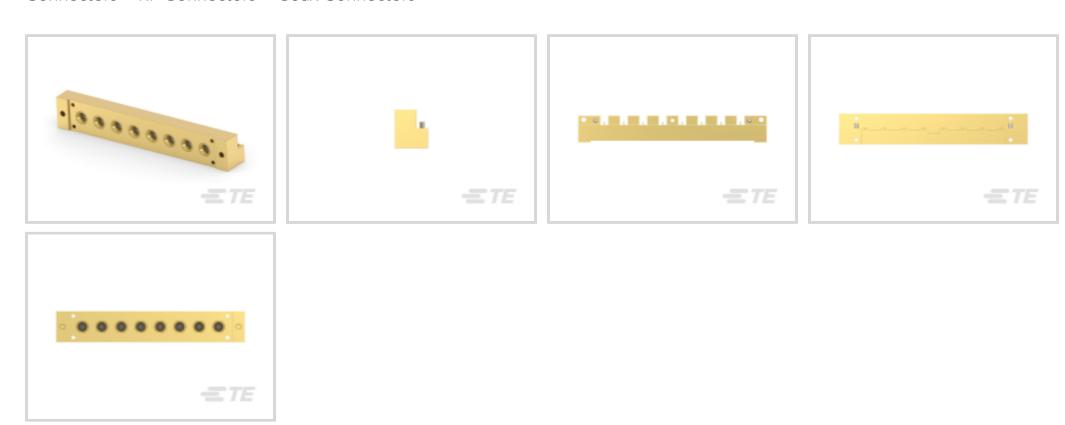

RF Interface: **SMPM**

RF Connector Style: Plug

Impedance: 50Ω

RF Connector Coupling Mechanism: Push-On

Operating Frequency: 0 – 65 GHz

Features

Product Type Features

Troduct Type reduces	
RF Interface	SMPM
RF Connector Style	Plug
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Coaxial Contacts	8
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold



Contact Features

RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper
Mechanical Attachment	
RF Connector Coupling Mechanism	Push-On
RF Contact Captivation Method	Mechanical
Detent	Without
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-131 – 257 °F]
Operation/Application	
Operating Frequency	0 – 65 GHz
Packaging Features	
Packaging Method	Bag & Box
Other	

PTFE

Product Compliance

Dielectric Material

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (4.35% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



Documents

Product Drawings

SMPM FD M,STR,8 PORT,END LAUNCH,65G RFSC

English

CAD Files

Customer View Model

ENG_CVM_CVM_2441485-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2441485-1_1.3d_igs.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2441485-1_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages

dnd-flyer-rf-connector-ca-tm-en

English

SMPM RF Interface, Plug, 50 Ω , Push-On, 0 – 65 GHz Operating Frequency, Cable-to-Board, Printed Circuit Board, -55 – 125 °C [-131 – 257 °F], Straight



dnd-fly-rf-connector-catm-cn-0224

Product Specifications
Product Specification

English