
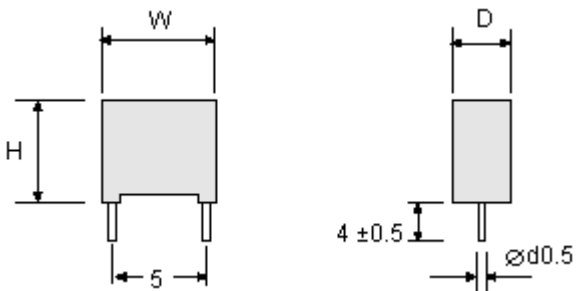


# 5mm Plastic Film

Boxed

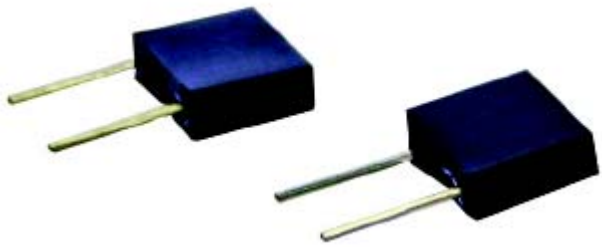

Dimensions : Millimetres

## Features:

- A range of industry standard, 5mm, pitch metallised polyester capacitors, stacked construction.
- Epoxy resin encapsulated in flame retardant plastic cases with stand-off feet.
- Metallised Polyester.
- Industry standard pitch of 5mm.
- Tolerance of 10%.
- Body colour: grey.

## Specifications:

Working voltage at 85°C	: 63V dc/40V ac.
Capacitance intolerance	: +10%.
Full operating temperature range	: -55°C to +85°C.
Maximum temperature with voltage derating	: +105°C.
Insulation resistance/time constant	: $\geq 15,000M\Omega$ ( $\geq 5,000$ seconds $C \geq 0.33\mu F$ ).
Dissipation factor	: $\leq 1\%$ at 1kHz.

## Part Number Table

Volts	Type ( $\mu F$ )	Maximum Width (W)	Maximum Height (H)	Maximum Depth (D)	Part Number
63	0.001	7.2	6.5	See Tech Attributes	MCPBSFC-1J102KA45
	0.0022				MCPBSFC-1J222KA45
	0.0047				MCPBSFC-1J472KA45
	0.01				MCPBSFC-1J103KA45
	0.022				MCPBSFC-1J223KA45
	0.047				MCPBSFC-1J473KA45
	0.1		MCPBSFC-1J104KA45		
	0.22		MCPBSFC-1J224KA45		
	0.47		MCPBSFC-1J4474KB45		
	1.0		MCPBSFC-1J105KB45		

Dimensions : Millimetres

**Disclaimer** This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.