


NAIS

Automotive Ultra-Miniature Power Relay

JS-M RELAYS



mm inch

- Low pick-up voltage for high ambient use
- Sealed construction
- Ultra-miniature size with universal footprint
- Usable at high temperature: 85°C 185°F

SPECIFICATIONS

Contact

		Standard type	High capacity type	
Arrangement		1 Form A, 1 Form C		
Contact material		Silver alloy		
Initial contact resistance, max.* (By voltage drop 6 V DC 1 A)		200 mΩ	100 mΩ	
Initial voltage drop		Max. 0.2 V (at 10 A 12 V DC)		
Rating	Nominal switching capacity	10 A 16 V DC (resistive) 5 A 16 V DC, Inrush 25 A (motor load)	15 A 16 V DC (resistive) 10 A 16 V DC, Inrush 50 A (motor load)	
	Max. switching power	160 W	240 W	
	Max. switching voltage	16 V DC	16 V DC	
	Max. switching current	10 A	15 A (10 A max. at 85°C)	
Expected life (min. ope.)	Mechanical life (at 180 cpm)	10 ⁷		
	Electrical	Resistive	10 ⁵	N.O.: 10 ⁵ N.C.: 5×10 ⁴
		Motor load	N.O.: 10 ⁵	N.O.: 10 ⁵

* Measured after operating 5 times at the rated load

Coil

Nominal operating power	640 mW
-------------------------	--------

Contact rating

Load	Standard type			High capacity type		
	Form A	Form C		Form A	Form C	
		N.O.	N.C.		N.O.	N.C.
Max. carry current	15 A	15 A	15 A	15 A	15 A	15 A
Max. make current	25 A	25 A	10 A	50 A	50 A	15 A
Max. break current	10 A	10 A	10 A	15 A	15 A	15 A

Characteristics

Max. operating speed (at rated load)	15 cps.	
Initial insulation resistance* ¹	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage* ²	Between open contacts	750 Vrms for 1 min.
	Between contacts and coil	1,500 Vrms for 1 min.
Operate time* ³ (at nominal voltage)	Approx. 10 ms	
Release time (without diode)* ³ (at nominal voltage)	Approx. 10 ms	
Shock resistance	Functional* ⁴	Min. 98 m/s ² {10 G}
	Destructive* ⁵	Min. 980 m/s ² {100 G}
Vibration resistance	Functional* ⁶	Approx. 98 m/s ² {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
	Destructive	Approx. 117.6 m/s ² {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage* ⁷ (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +85°C -40°F to +185°F
	Humidity	5 to 85% R.H.
Unit weight	Approx. 12 g .423 oz	

Remarks

- *¹ Measurement at same location as "Initial breakdown voltage" section
- *² Detection current: 10mA
- *³ Excluding contact bounce time
- *⁴ Half-wave pulse of sine wave: 11ms; detection time: 10μs
- *⁵ Half-wave pulse of sine wave: 6ms
- *⁶ Detection time: 10μs
- *⁷ Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 49)

TYPICAL APPLICATIONS

- Automotive:
Power-window, car antenna, door lock, intermittent wiper, interior lighting, power seat, power sunroof, car stereo power antenna, etc.

ORDERING INFORMATION

Ex. JSM 1a F — 12V — 4

Contact arrangement	Protective construction	Coil voltage (DC)	Contact material
1a: 1 Form A 1: 1 Form C	Nil: Sealed construction F: Flux-resistant type	9, 12 V	4: Standard type (10 A) 5: High capacity type (15 A)


Note: Standard packing: Carton: 100 pcs. Case: 500 pcs.

TYPES AND COIL DATA (at 20°C 68°F)

Contact arrangement	Coil voltage, V DC	Standard type (10 A)		High capacity type (15 A)		Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance Ω ($\pm 10\%$)	Nominal operating current, mA ($\pm 10\%$)	Nominal operating power, mW	Max. allowable voltage, V DC (at 80°C 176°F)
		Sealed type	Flux-resistant type	Sealed type	Flux-resistant type							
1 Form A	9	JSM1a-9V-4	JSM1aF-9V-4	JSM1a-9V-5	JSM1aF-9V-5	9	4.7	0.7	126	71.4	640	12
	12	JSM1a-12V-4	JSM1aF-12V-4	JSM1a-12V-5	JSM1aF-12V-5	12	6.3	0.9	225	53.3	640	16
1 Form C	9	JSM1-9V-4	JSM1F-9V-4	JSM1-9V-5	JSM1F-9V-5	9	4.7	0.7	126	71.4	640	12
	12	JSM1-12V-4	JSM1F-12V-4	JSM1-12V-5	JSM1F-12V-5	12	6.3	0.9	225	53.3	640	16



DIMENSIONS

mm inch

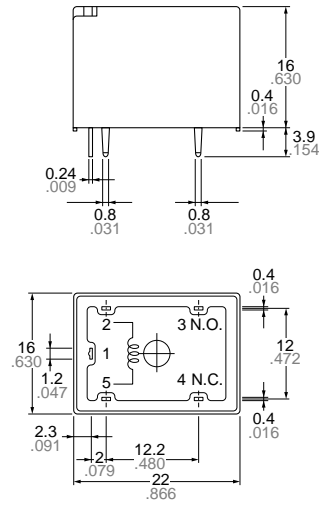

Schematic (Bottom view)

PC board pattern (Copper-side view)

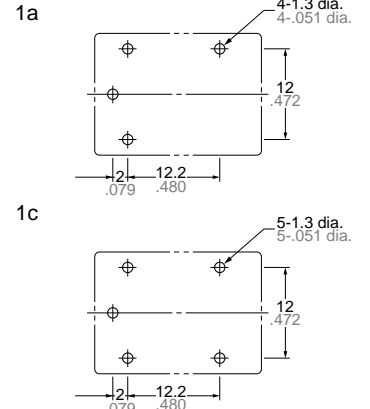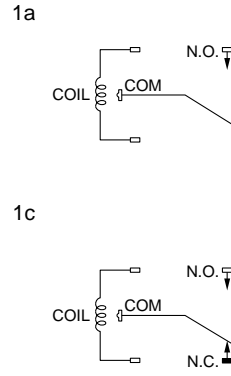

Note: Terminal No. 4 is only for 1 Form C type


General tolerance: $\pm 0.3 \pm .012$

REFERENCE DATA


1-(1) Electrical life test (Resistive)

Tested sample: JSM-12V-4, 3 pcs.
Condition: 10 A 16 V DC resistive load, 20 cpm
Ambient temperature: 25°C 77°F


Circuit

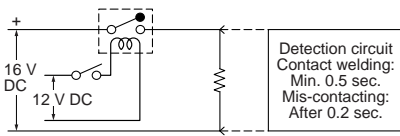

Change of pick-up and drop-out voltage

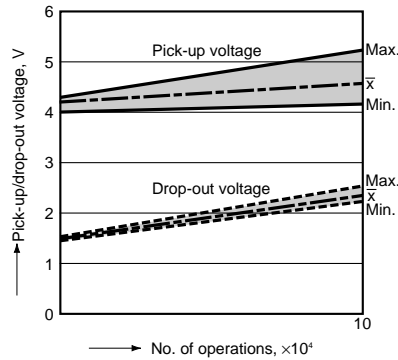


Change of contact resistance

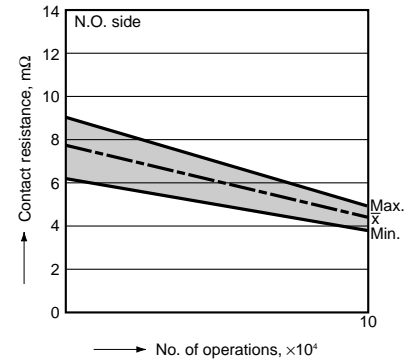


1-(2) Electrical life test (Power window motor load)

Tested sample: JSM1-12V-4, 4 pcs.
Load: DC 14 V
(1) Max. 14.8 A (Inrush) Max. 14.2 A (Break)
(2) Max. 20.3 A (Inrush) Max. 20.0 A (Break)
(3) Max. 16.2 A (Inrush) Max. 11.6 A (Break)
Switching frequency: 3 cycle/min. (ON:OFF = 1:9 s)
Ambient temperature: (1) 85°C 185°F;
(2) -40°C -40°F; (3) 35°C 95°F
Tested cycle: (1) 2 x 10⁴ cycle → (2) 2 x 10⁴ cycle →
(3) 11 x 10⁴ cycle (Total 15 x 10⁴ cycles)


Circuit

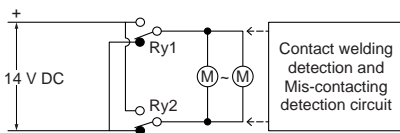

Change of pick-up and drop-out voltage

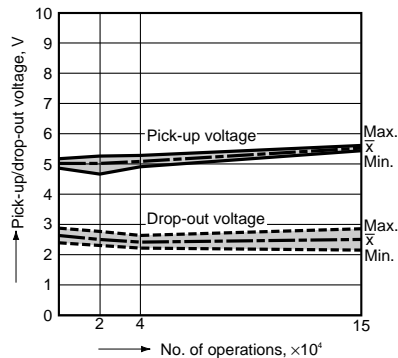

Change of contact resistance

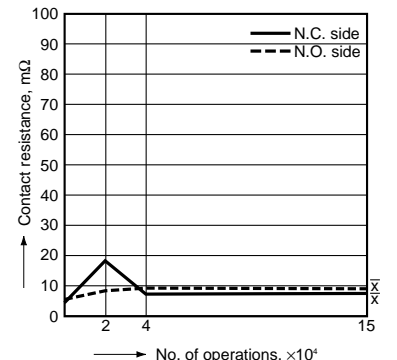


JS-M


1-(3) Electrical life test (Door lock motor load)

Tested sample: JSM1-12V-4, 10 pcs.
 Load: DC 16 V Max. 17.7 A, Min. 15.2 A
 Switching frequency: 6 cycles/min.
 (ON:OFF = 0.5:0.5 s)
 Ambient temperature: 30°C 86°F
 Tested cycle: 4×10^4 cycles


Circuit



Change of pick-up and drop-out voltage

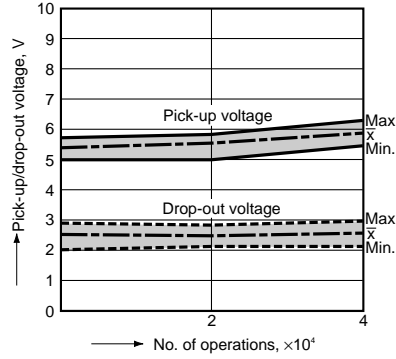


Change of contact resistance

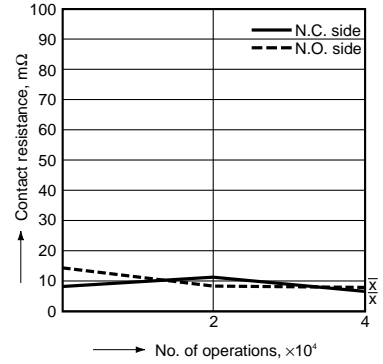


1-(4) Electrical life test

Tested sample: JSM1-12V-4, 3 pcs.
 Load: 16 V DC 25 A/5 A motor load
 Switching frequency: 6 cycles
 (ON:OFF = 1:9 s)
 Ambient temperature: 27°C 81°F


Circuit

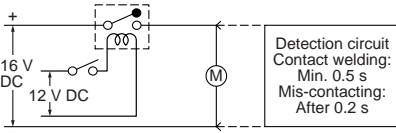

Change of pick-up and drop-out voltage

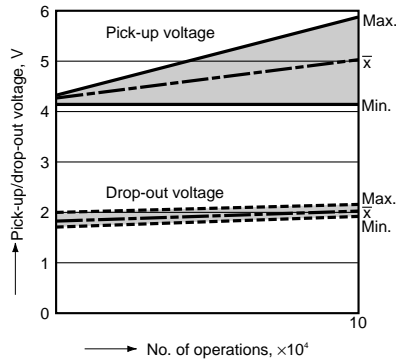


Change of contact resistance

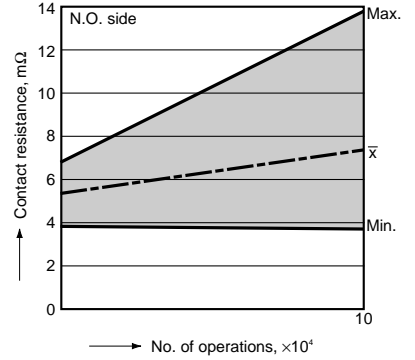


1-(5) Electrical life test

Tested sample: JSM1-12V-5, 4 pcs.
 Load: 16 V DC 15 A (resistive)
 Switching frequency: 20 cpm
 Ambient temperature: 25°C 77°F


Circuit

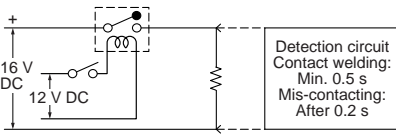

Change of pick-up and drop-out voltage

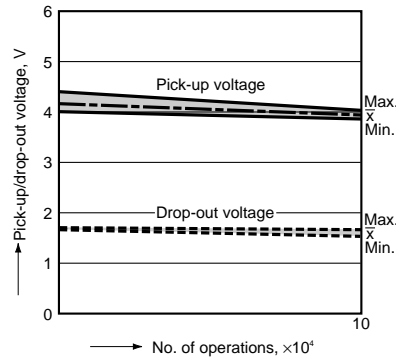


Change of contact resistance

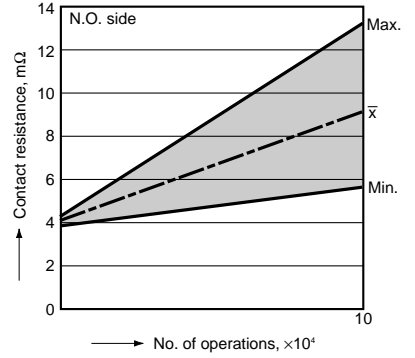


1-(6) Electrical life test

Tested sample: JSM1-12V-5, 3 pcs.
 Load: 16 V DC 50 A/10 A motor load
 Switching frequency: 6 cycles
 (ON:OFF = 1:9 s)
 Ambient temperature: 27°C 81°F


Circuit

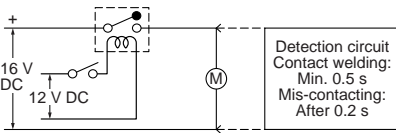

Change of pick-up and drop-out voltage

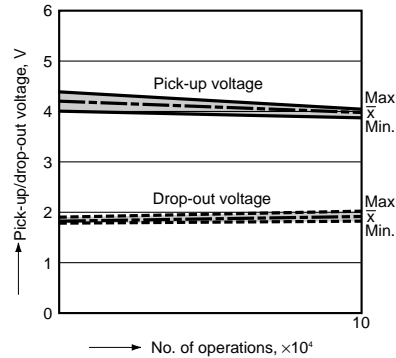


Change of contact resistance

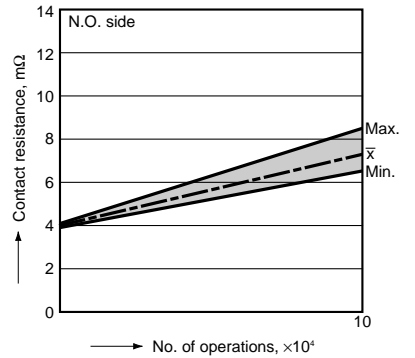


2. Temperature rise

Tested sample: JSM1-12V-4 & -5, 5 pcs.
 Measured portion: Inside the coil

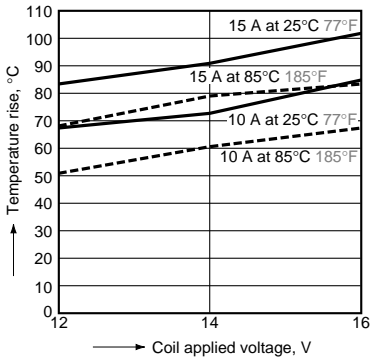


3. Ambient temperature characteristics

Tested sample: JSM1-12V-4 & -5, 6 pcs.




4. Operate/release/bounce time

Sample: JSM1a-12V-5, 25 pcs.

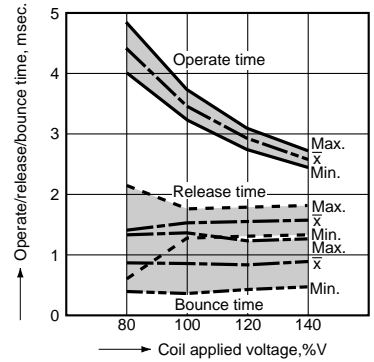

5. Maximum switching power

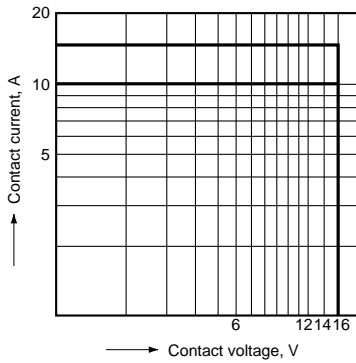

For Cautions for Use, see Relay Technical Information (Page 36 to 64).