




	ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. SPC-F005.DWG			REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
				DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
				1891	A	RELEASED	EO	06/27/06	YA	7/25/06	HO	7/25/06

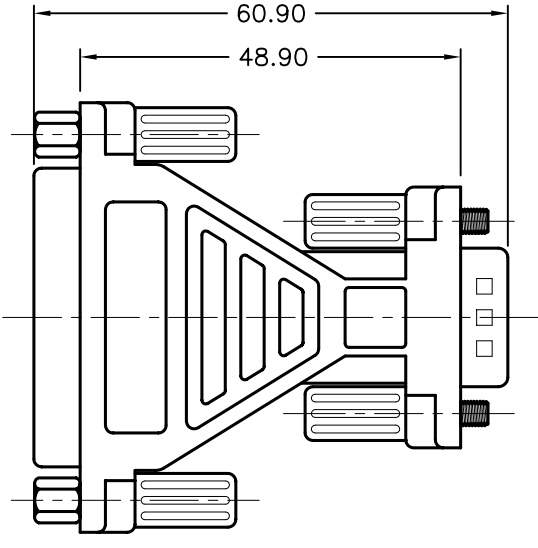

DB-25(F)

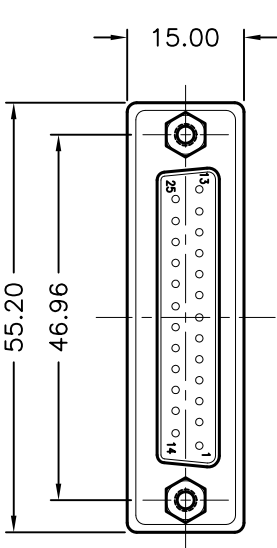

DB-9(M)

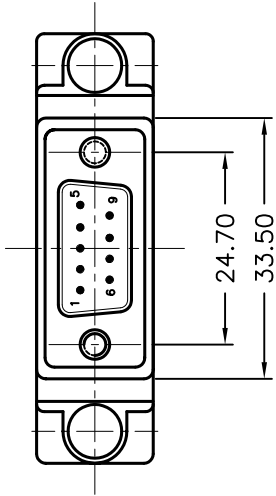

PIN DIAGRAM	
DB-25(F)	DB-9(M)
8	1
3	2
2	3
20	4
7	5
6	6
4	7
5	8
22	9
SHELL	SHELL

- Specifications:**
1. Body: PVC, Gray Color
 2. Metal Shell: Steel, Nickel-Plated
 3. Contact: Brass Gold-Plated
 4. Insulator: PBT, Blue Color
 5. Thumb Screws: Steel, Nickel-Plated with Gray PVC Handle
 6. Hex Nut: Brass, Nickel-Plated

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
	Unless Otherwise Specified .X ±0.2 [0.008] .XX ±0.12 [0.005]	EKLAS ODISH	06/27/06	Adapter, Modem to Mouse, DB9P Male/DB25P Female			
		CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
		YILMAZ AKYONDEM	7/25/06	A	SPC19828	84K8590.DWG	A
		APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: mm [INCHES]	SHEET: 1 OF 1
		HISHAM ODISH	7/25/06				