

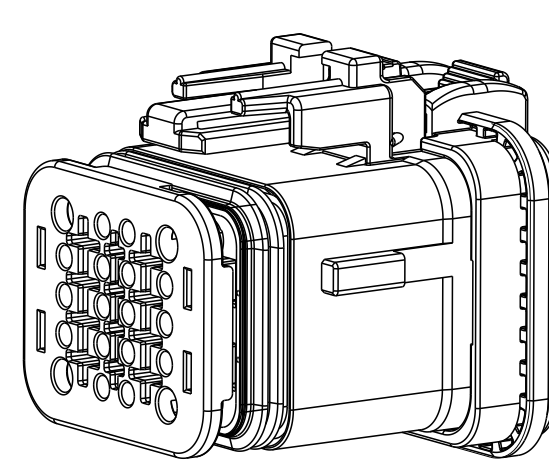




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	28MAR2019	C.W	I.Y
	A1	ECR-20-000774	21JAN2019	C.W	E.J
	A2	ECR-20-000774	26FEB2020	C.W	E.J

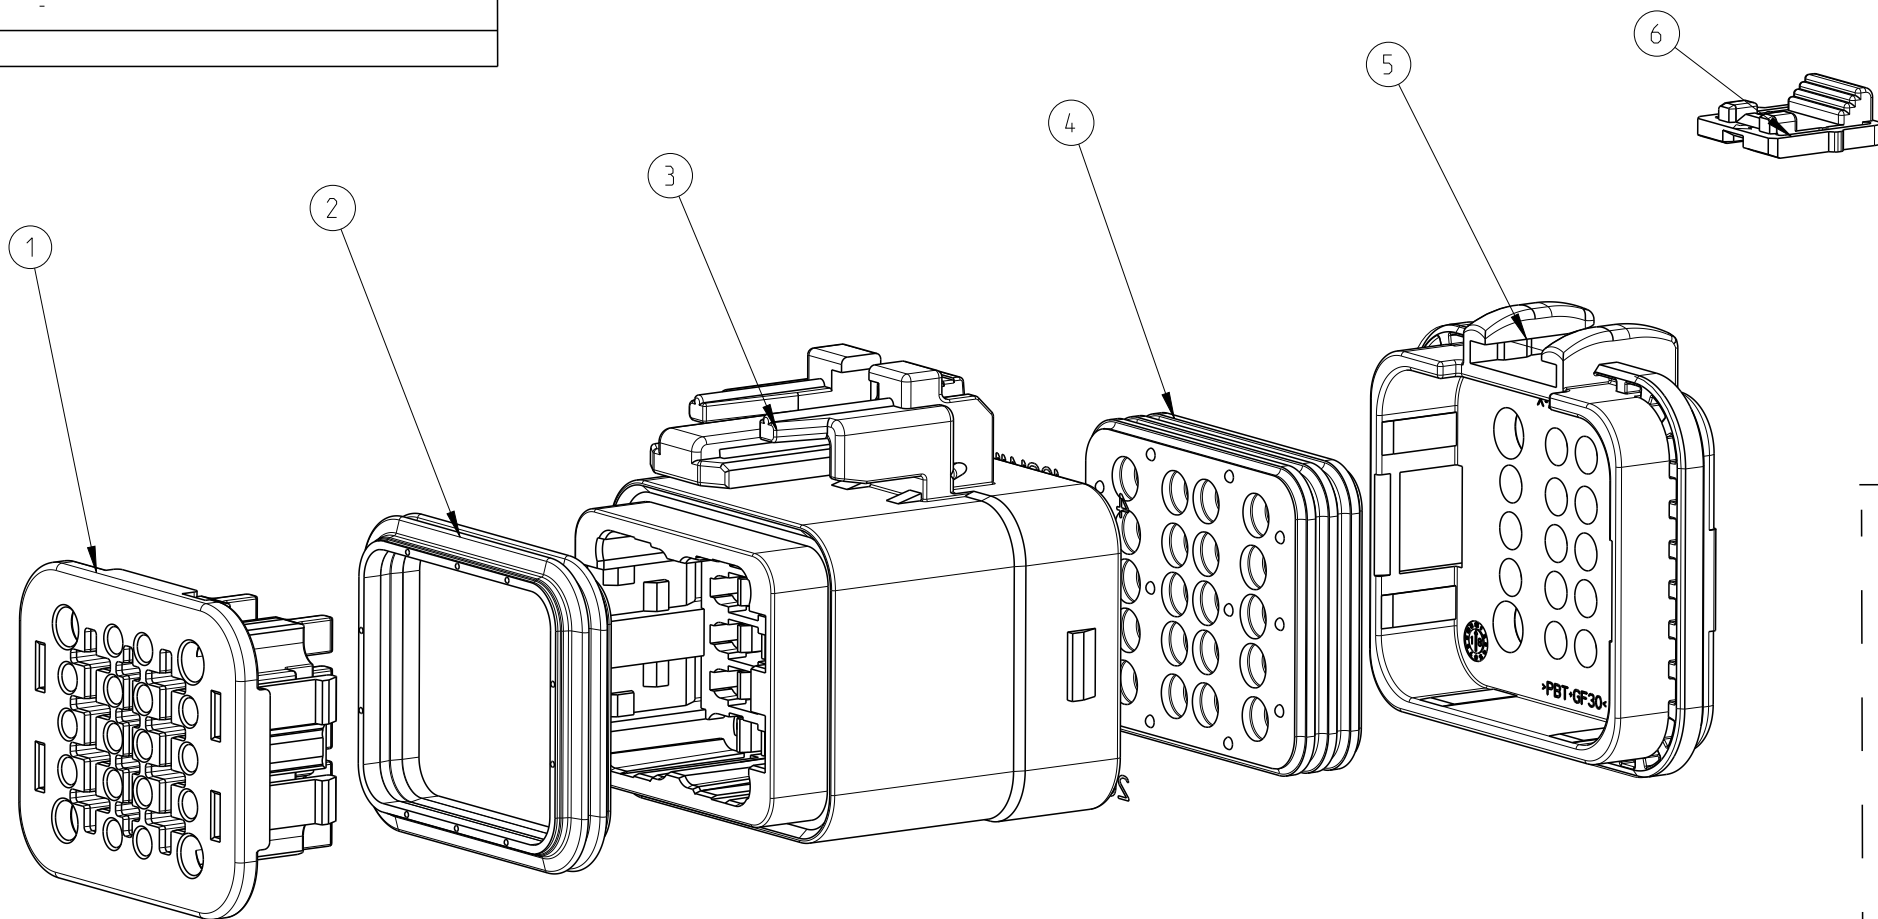

2350890-2
2350890-3
2350890-4

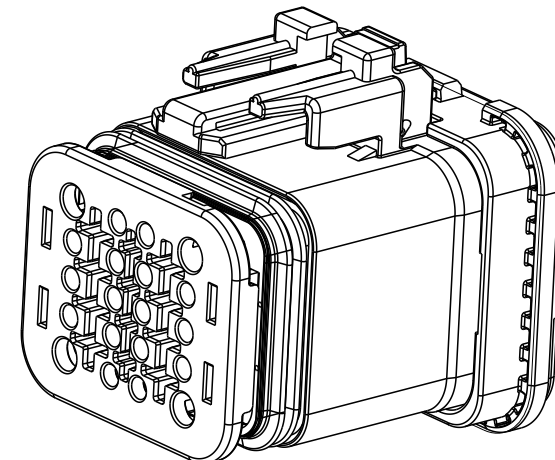

1-2350890-2
1-2350890-3
1-2350890-4

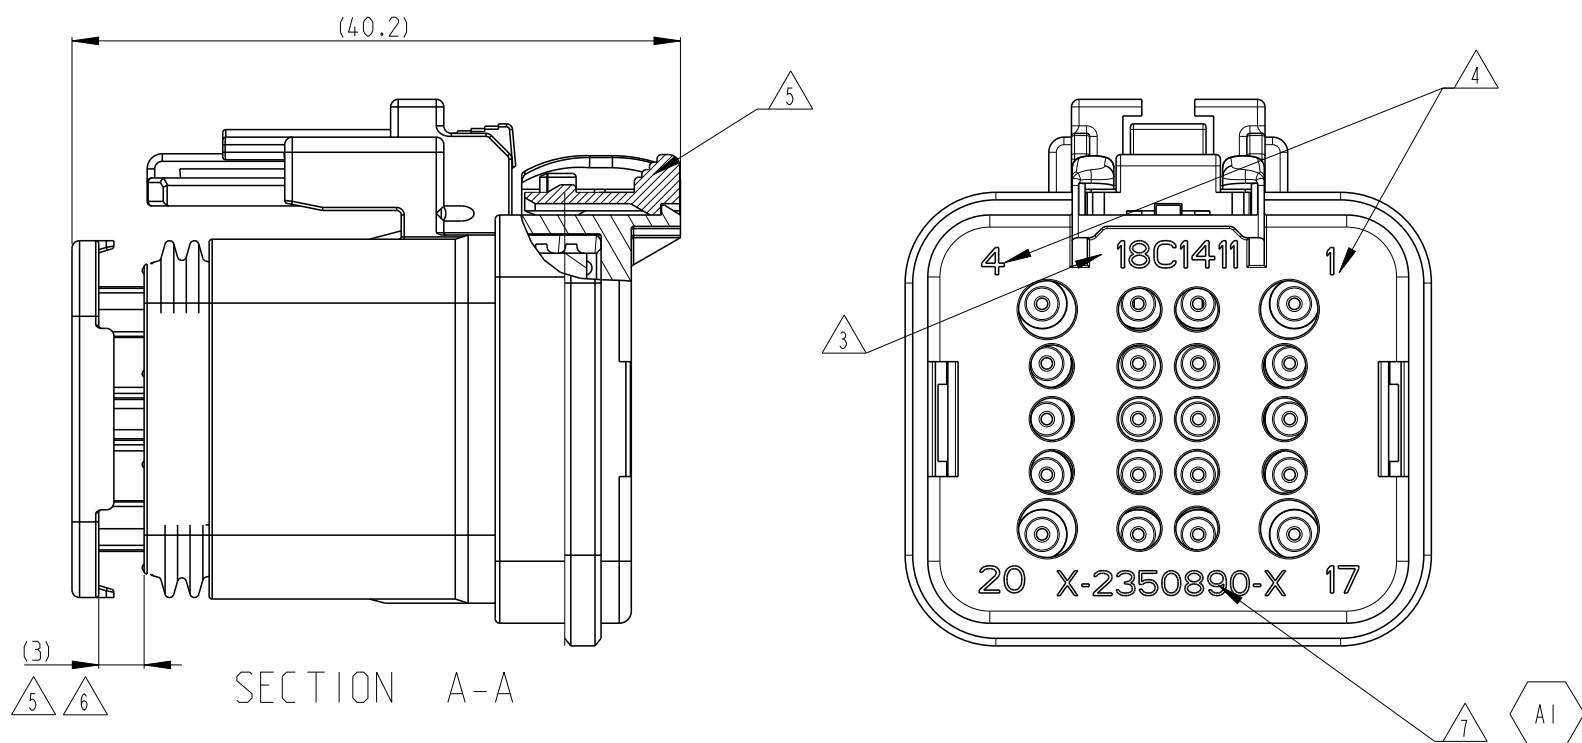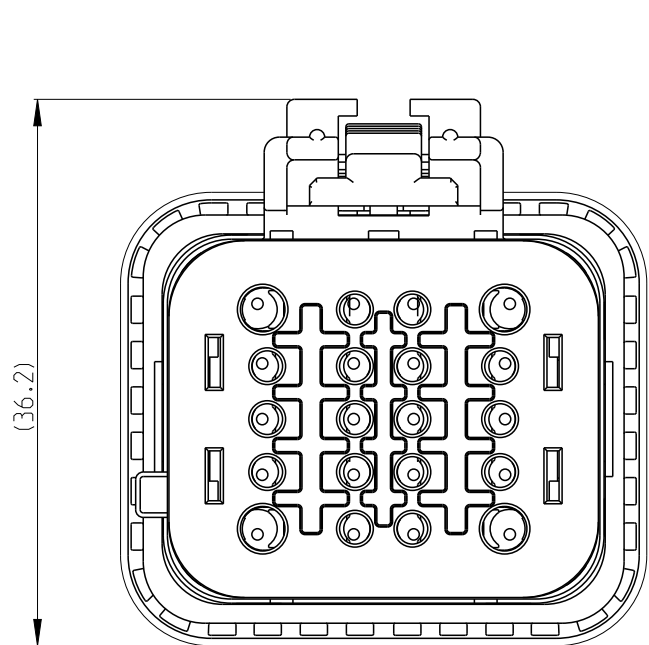

NOTES:

1. THIS PLUG MATES WITH TAB HOUSING ASSEMBLY PN 2350891-X, 1-2350891-X OR 2-2350891-X (X=1, 2, 3, 4 FOR VARIOUS CODE).
2. MATERIAL: HOUSING: PBT GF30, SEE PN TABLE FOR COLOR
TPA: PBT GF30, YELLOW
FRONT SEAL: VMQ(ORANGE)
GROMMET:VMQ(RED)
REAR CAP: PBT GF30, BLACK

- 3 DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS(17=2017)
MONTH: THIRD DIGIT , EXCLUDING I , A=JAN, B=FEB, C=MARCH...(K=OCTOBER)
DAY: FOURTH AND FIFTH DIGITS(14=14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS(11=11AM)

4. IDENTIFICATION FOR CABLE PINOUT.


- 5 TPA AND CPA SEATED ON PRE-LOCK POSITION FOR DELIVERY.






- 6 PULL TPA TO PRE-LOCK BEFORE TERMINAL INSERTION IN CASE OF TPA BEING HIT TO END-LOCK POSITION.

- △ 7 PART NO.

8. REFER TO 114-151001 FOR DT SIZE 16 TERMINAL APPLICATION SPECIFICATION.
REFER TO 114-151003 FOR DT SIZE 20 TERMINAL APPLICATION SPECIFICATION.
APPLICABLE TERMINAL PART NUMBERS AND WIRE SIZE:

TERMINAL PN	WIRE SIZE (MM2)	INSULATION WIRES(MM)	PINOUT NUMBER
16#	0.5~1.5	Ø1.40~Ø2.40	1, 4, 17, 20
20#	0.5~1.5	Ø1.40~Ø2.40	OTHER PINS

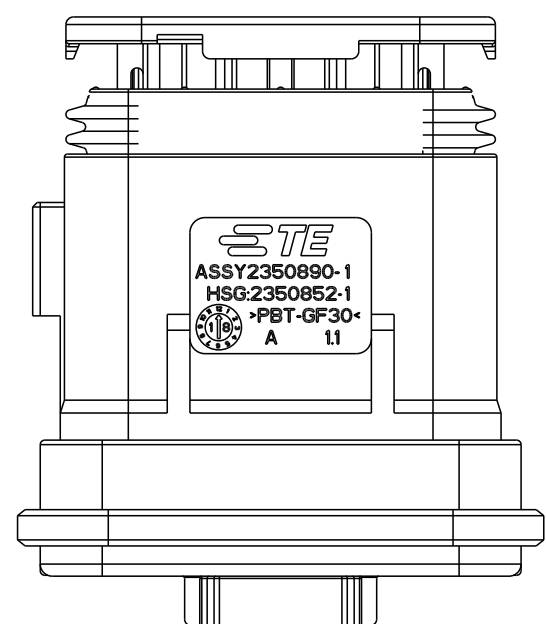

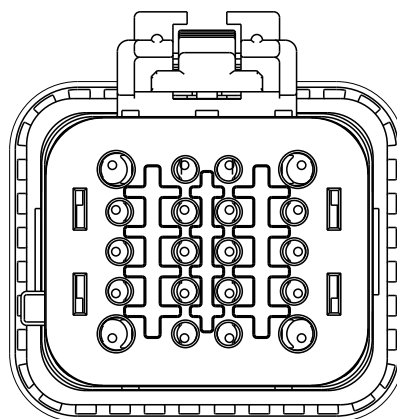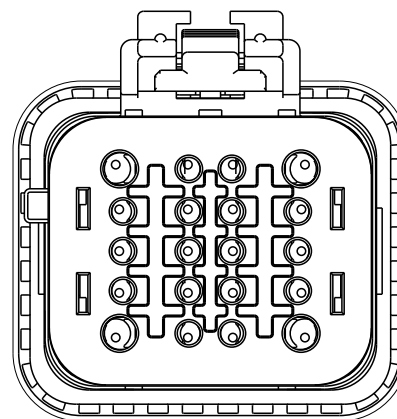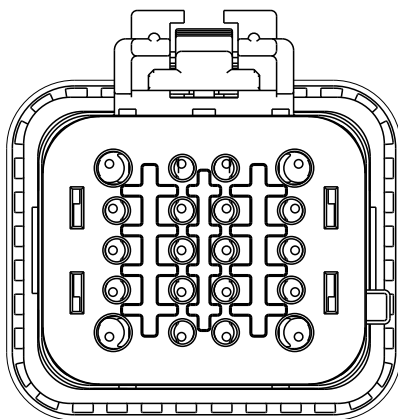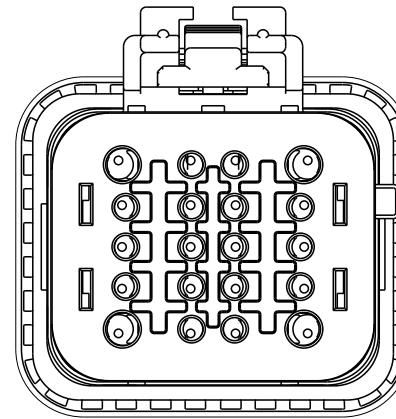																			
CODING A PN:2350890-1 1-2350890-1					CODING B PN:2350890-2 1-2350890-2					CODING C PN:2350890-3 1-2350890-3					CODING D PN:2350890-4 1-2350890-4				
-	-	-	-	1	1	1	1	RED	PBT-GF15	CPA				6					
1	-	-	-	1	-	-	-	BLUE	PBT-GF30	REAR CAP				5					
-	1	-	-	-	1	-	-	GREEN											
-	-	1	-	-	-	1	-	GRAY											
-	-	-	1	-	-	-	1	BLACK											
1	1	1	1	1	1	1	1	RED	VMQ	GROMMET				4					
1	-	-	-	1	-	-	-	BLUE	PBT-GF30	HOUSING.CODE D				3					
-	1	-	-	-	1	-	-	GREEN	PBT-GF30	HOUSING.CODE C									
-	-	1	-	-	-	1	-	GREY	PBT-GF30	HOUSING.CODE B									
-	-	-	1	-	-	-	1	BLACK	PBT-GF30	HOUSING.CODE A									
1	1	1	1	1	1	1	1	RED	VMQ	RADIAL SEAL				2					
1	1	1	1	1	1	1	1	YELLOW	PBT-GF30	TPA				1					
QTY. REQUEST PER ASSY								COLOR	MATERIAL	DESCRIPTION				ITEM NO					
25.5	25.5	25.5	25.5	25.9	25.9	25.9	25.9	WEIGHT OF EACH ASSY(g)											
A	A	A	A	A	A	A	A	REVISION OF EACH ASSY NO.											
1--4	1--3	1--2	1--1	--4	--3	--2	--1	TE ASSEMBLY PN											
THIS DRAWING IS A CONTROLLED DOCUMENT.								DWN C.WAN 01MAR2019 CHK E.JIANG 28MAR2019 APVD L.YIN 28MAR2019		 TE Connectivity NAME PLUG ASSEMBLY NTS 20Pos CONNECTOR DEUTSCH TERMINAL HYBRID CONNECTOR									
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ±				PRODUCT SPEC 108-101662 APPLICATION SPEC -											
				MATERIAL - -				WEIGHT -											
				CUSTOMER DRAWING				SCALE 1:1											
								A200779		C=2350890				RESTRICTED TO -					
										SHEET 1 OF 1		REV A2							