
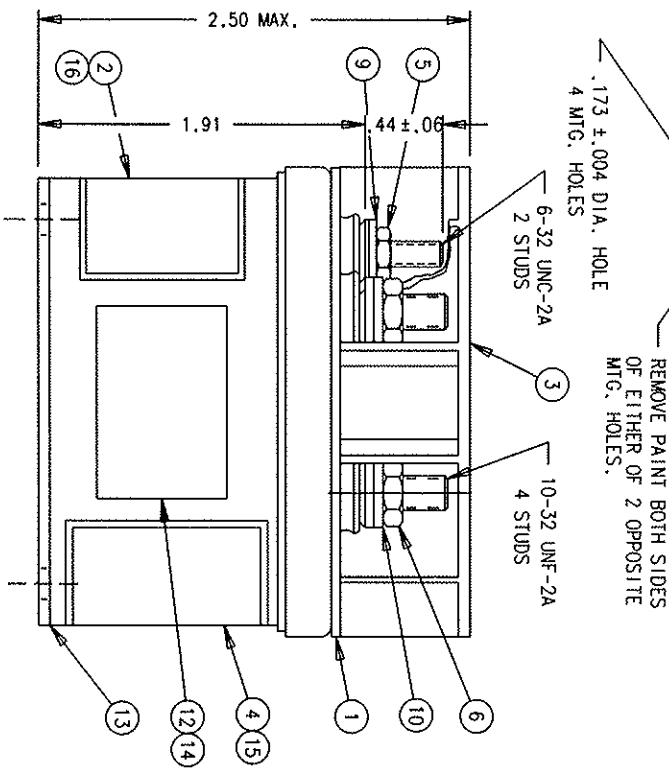


CONSTRUCTION	GASKET SEALED & VENTED
NOMINAL VOLTAGE	28VDC
CONTACT RATING, RES AND IND	
A1-A2, A3-A4	50 AMP AT 28 VDC
INTERRUPTION CAPABILITY	500 AMP
COIL RATING	
PICKUP	28VDC
DROPOUT	18V, MAX. HOT
RATED DUTY	7 V. MAX., HOT
VIBRATION	CONTINUOUS
AMBIENT TEMP.	15 G'S TO 1000 CPS
MAX. WEIGHT	-65°F TO 165°F
	11.5 OZ.

1. TERMINAL SHIELD IS NOTCHED FOR DRAINAGE.
2. STAMP MONTH AND YEAR OF MFG ON CONTACTOR.
3. ITEMS 5, 6, 9, & 10 TO BE SILVER PLATED.
4. COVER MATERIAL IS ALUMINUM, PAINTED WITH BLACK LAQUER.
5. FPA/PMA PLATE (AND OVERLAY) NOT REQUIRED ON UNITS SUPPLIED TO ORIGINAL EQUIPMENT MANUFACTURERS.

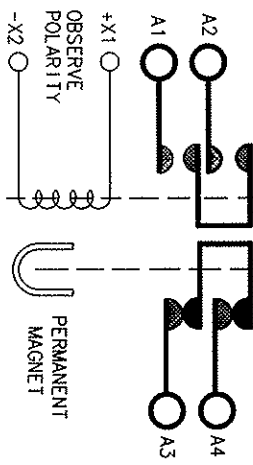

16	1	39529-026	OVERLAY			
15	1	39529-038	OVERLAY			
14	1	39529-047	OVERLAY			
13	1	37044-010	CONTRACTOR ASSEMBLY - PRIMARY			
12	1	58400-038	PLATE - FAA/PLA			
11	2	51701-180	WASHER - .015 X .103 X 3/16			MYLAR
10	4	51810-054	WASHER-LOCK-NO.10 SPL11 TYPE			BRONZE
9	2	51806-014	WASHER-LOCK-NO.6 SPL11 TYPE			BRONZE
8	2	51805-011	WASHER-LOCK-NO.5 SPL11 TYPE			BRONZE
7	2	51205-591	SCREW - 5-40 X 3/8 RD. HD.			BRASS
6	4	50410-054	NUT - 10-32 X 5/16 X 9/64 HEX.			BRASS
5	2	50406-034	NUT - 6-32 X 1/4 X 5/64 HEX			BRASS
4	1	16581-001	PLATE - WIRING DIAGRAM			
3	1	15549-001	SHIELD - TERMINAL			
2	1	16043-001	PLATE - NAME			
1	1	15537-007	PLATE - BASE COVER			
FIND NO	QTY	PART OR IDENTIFYING NO	DESCRIPTION OR NOMENCLATURE OR	FSCD NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
(ALLS OTHERS SPECIFIED DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED)						
2 PL DEC.13 PL DEC.1 ANGLES						
=.03		=.010		=.1*		
MATERIAL						
DR BY			RLS 198/05/26			
CHK BY			JCS 198/05/26			
ENGR			JCS 198/05/26			
MFG			198/05/26			
RELEASE			198/05/26			
CONTR. NO.						
GOVT APPVL						
SIZE		CODE IDENT		DWG NO.		
C		74063		D-7AC		
HARTMAN ELECTRICAL MANUFACTURING MANSTFIELD, OHIO						
CONTACTOR - 2, SPST 1NO-1NC DB						
093						
SCALE		NONE		SHEET		