

LED

Ultra Green, 3mm

multicomp **PRO**

RoHS
Compliant



Specifications:

Dice material	: InGaN
Emitted color	: Ultra Green
Lens color	: Water Clear
Peak wavelength	: 525nm
Viewing angle	: 36°
Luminous intensity (IV)	: 4,500mcd

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Reverse Voltage	5V
Reverse Current	10 μ A ($V_R = 5V$)
Electrostatics Discharge (ESD)	200V
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 100°C
Lead Soldering Temperature Range 1.6mm (1/16 inch) from body	260°C for 5 Seconds



Electrical/Optical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Test
Luminous Intensity	IV	2,300	4,500	6,800	mcd	IF = 20mA
Viewing Angle	2 θ 1/2	-	36	-	degrees	
Peak Emission Wavelength	λ_P	-	525	-	nm	-
Dominant Wavelength	λ_D	-	527	-		-
Spectral Line Half-Width	$\Delta\lambda$	-	36	-		-
Forward Voltage	VF	2.7	3.4	4	V	IF = 20mA
Power Dissipation	Pd	-	-	85	-	-
Peak Forward Current (Duty 1/10 at 1KHz)	IF (Peak)	-	-	100	-	-
Recommended Operating Current	IF (Rec)	-	20	-	mA	-



LED

Ultra Green, 3mm

Ultra Green (InGaN $\lambda_P = 525\text{nm}$)

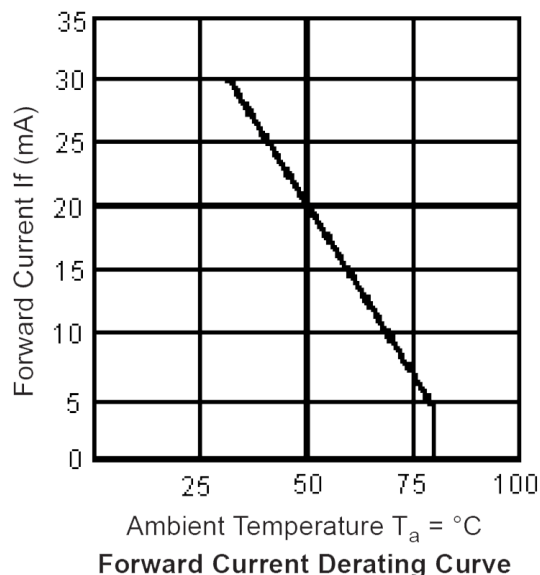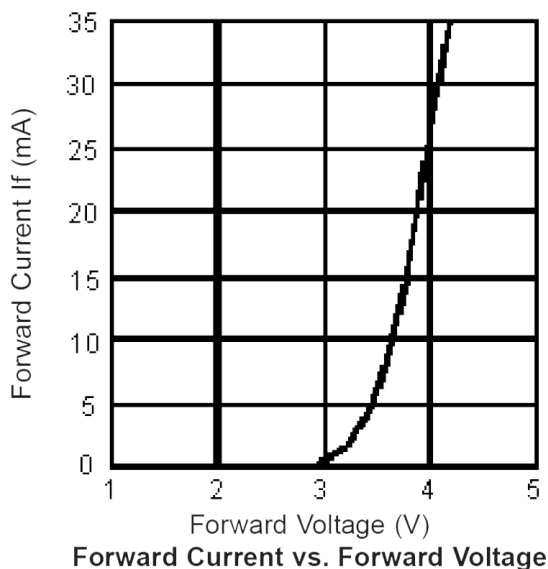



Ultra Green (InGaN $\lambda_P = 525\text{nm}$)

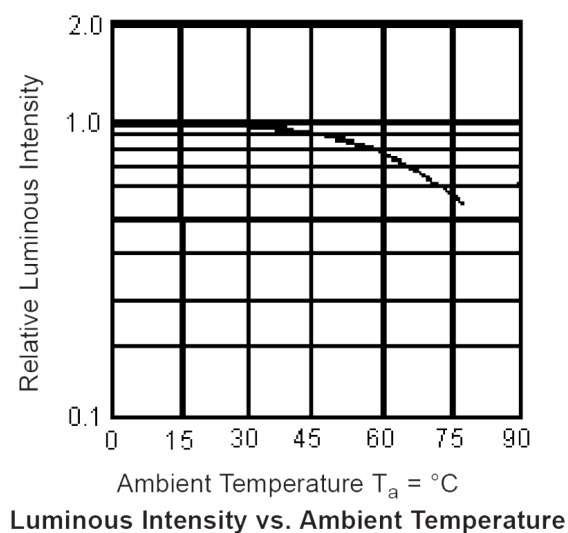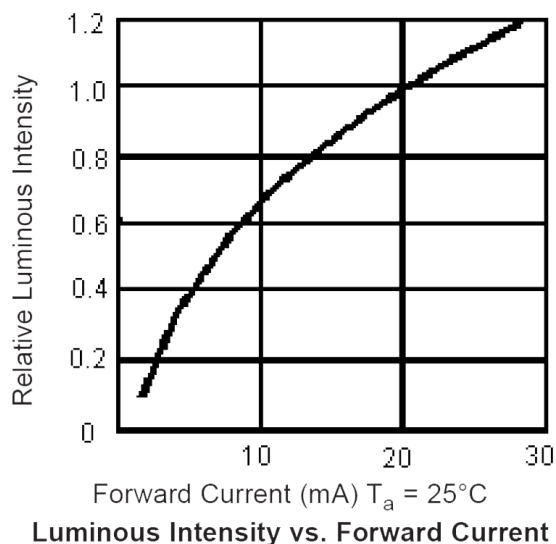

LED

Ultra Green, 3mm

multicomp PRO

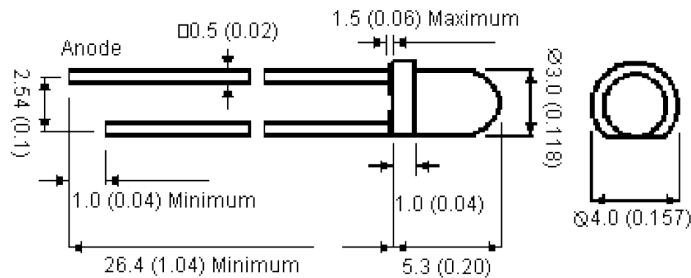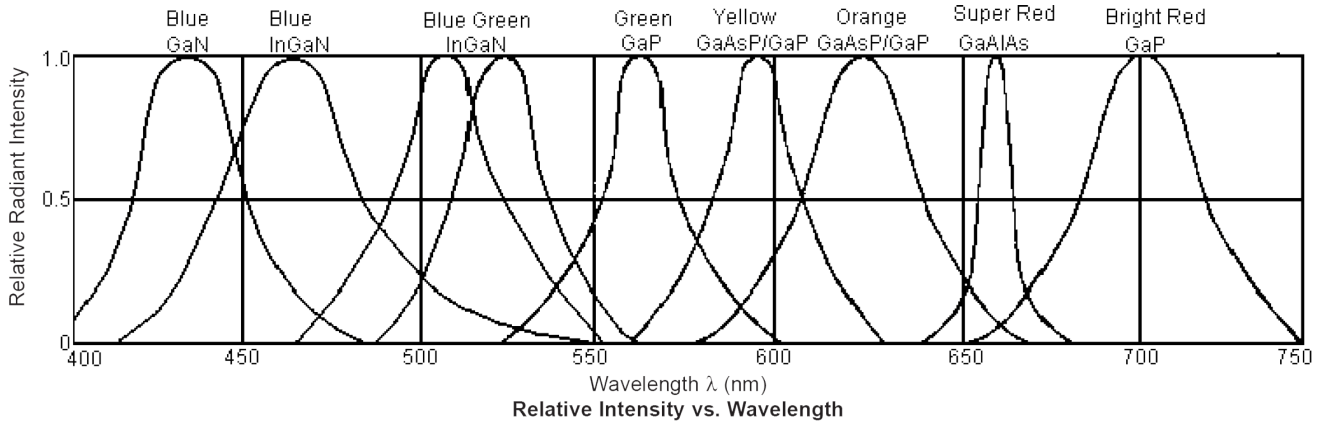

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
LED, 3mm, 32°, Ultra-Green	MCL034UGC

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO