



Product Change Notification

Current Date: 05-Nov-2020

TE Connectivity

Product Change Notification: P-20-019958

PCN Date: 05-NOV-20

Customer: TTI, Inc. (1305175)

Location: Maisach-gernlinden

Agreement: TTI001

TE would like to inform you of the following change(s) to the listed TE Connectivity Product. In case of any further questions about this change(s), please contact your TE Connectivity Sales Engineer. Affected part, drawing and/or specification numbers are listed on the attached sheet(s).

General Product Description:

Metal Oxide Film Resistor Type ROX1S

Description of Changes

Correction of terminal lead diameter from 0.54 to 0.70 0.05mm in customer facing documentation. Ref. PCN: E20-015646 N.B. Physical product has NOT changed.

Other attachments:

[Data Sheet ROX-1120](#)

Reason for Changes:

Document clarification. Due to a confusion between a special, narrow leaded version of the ROX1S and the standard version, the diameter of the standard resistor leads was changed to the diameter of the special resistor leads, on all documentation. This has now been corrected with immediate effect. N.B. This error affected only customer facing documentation. Production documentation retained the correct information, and product manufacturing was to the correct specification - 0.70 0.05mm

Estimated Dates:

Last Order Date (Obsolete Parts Only):

First Date To Ship (Changed Parts Only):

11-DEC-2020

Last Ship Date (Obsolete Parts Only):

Last Date for Mixed Shipments: (Changed Parts Only):

No Mixed Shipments

Part Number(s) being Modified:

Part Number	Part Discontinued per PCN	Customer Drawing	Customer Part Number	Alias Part Number(s)	Substitute Part Number	Substitute Alias Part Number(s)	Description Of Difference
1-1625885-1	NO		TYC1-1625885-1, TYCROX1SJ100K	JIT, ROX1SJ100K			
1-1625885-2	NO		TYCROX1SJ100R	JIT, ROX1SJ100R			
1-1625885-4	NO		TYC1-1625885-4, TYCROX1SJ10R	JIT, ROX1SJ10R			
1-1625886-8	NO		TYCROX1SJ470R	JIT, ROX1SJ470R			
1-1625886-9	NO		TYCROX1SJ47K, TYC1- 1625886-9	JIT, ROX1SJ47K			
1625885-1	NO		TYC1625885-1, ROX1SJR10	ROX1SJR10			
1625886-6	NO		TYCROX1SJ33R	JIT, ROX1SJ33R			
2-1625886-2	NO		TYCROX1SJ4R7	JIT, ROX1SJ4R7			
3-1625885-1	NO		TYCROX1SJ1K0	JIT, ROX1SJ1K0			
3-1625885-5	NO		TYC3-1625885-5, TYCROX1SJ1K8	JIT, ROX1SJ1K8			
3-1625886-3	NO		TYCROX1SJ680R	JIT, ROX1SJ680R			
3-1625886-6	NO		TYCROX1SJ68R, TYC3- 1625886-6	JIT, ROX1SJ68R			
4-1625885-3	NO		TYCROX1SJ220K	JIT, ROX1SJ220K			
4-1625885-4	NO			JIT, ROX1SJ220R			
4-1625885-7	NO		TYCROX1SJ22R	JIT, ROX1SJ22R			
5-1625885-5	NO		TYCROX1SJ2R2	JIT, ROX1SJ2R2			

The documents listed below are being modified. Related parts that are not explicitly listed on this PCN are not being modified or discontinued as per the PCN. The Last Order Date, Last Ship Date, First Date to Ship Changed Parts and last date for Mixed Shipments apply only to parts explicitly listed on this PCN.

Customer Drawing(s) Being Modified:

Drawing Number	Related Part Number	Customer Part Number	Current Revision	New Revision
1625884	1-1625885-1	TYCROX1SJ100K, TYC1-1625885-1	BA1	
1625886	1-1625886-8	TYCROX1SJ470R	BA1	



Product Change Notification

Current Date: 05-Nov-2020

TE Connectivity

Product Change Notification: P-20-019958

PCN Date: 05-NOV-20

Customer: TTI, Inc. (3057778)

Location: Maisach-gernlinden

Agreement: Agreement Unknown

TE would like to inform you of the following change(s) to the listed TE Connectivity Product. In case of any further questions about this change(s), please contact your TE Connectivity Sales Engineer. Affected part, drawing and/or specification numbers are listed on the attached sheet(s).

General Product Description:
Metal Oxide Film Resistor Type ROX1S

Description of Changes
Correction of terminal lead diameter from 0.54 to 0.70 0.05mm in customer facing documentation. Ref. PCN: E20-015646 N.B. Physical product has NOT changed.
Other attachments:
[Data Sheet ROX-1120](#)

Reason for Changes:
Document clarification. Due to a confusion between a special, narrow leaded version of the ROX1S and the standard version, the diameter of the standard resistor leads was changed to the diameter of the special resistor leads, on all documentation. This has now been corrected with immediate effect. N.B. This error affected only customer facing documentation. Production documentation retained the correct information, and product manufacturing was to the correct specification - 0.70 0.05mm

Estimated Dates:

Last Order Date (Obsolete Parts Only):	First Date To Ship (Changed Parts Only):
	11-DEC-2020
Last Ship Date (Obsolete Parts Only):	Last Date for Mixed Shipments: (Changed Parts Only):
	No Mixed Shipments

Part Number(s) being Modified:

Part Number	Part Discontinued per PCN	Customer Drawing	Customer Part Number	Alias Part Number(s)	Substitute Part Number	Substitute Alias Part Number(s)	Description Of Difference
1-1625885-1	NO		TYC1-1625885-1, TYCROX1SJ100K	JIT, ROX1SJ100K			
1-1625885-2	NO		TYCROX1SJ100R	JIT, ROX1SJ100R			
1-1625885-4	NO		TYC1-1625885-4, TYCROX1SJ10R	JIT, ROX1SJ10R			
1-1625886-8	NO		TYCROX1SJ470R	JIT, ROX1SJ470R			
1-1625886-9	NO		TYCROX1SJ47K, TYC1-1625886-9	JIT, ROX1SJ47K			
1625886-6	NO		TYCROX1SJ33R	JIT, ROX1SJ33R			
2-1625886-2	NO		TYCROX1SJ4R7	JIT, ROX1SJ4R7			
3-1625885-1	NO		TYCROX1SJ1K0	JIT, ROX1SJ1K0			
3-1625886-3	NO		TYCROX1SJ680R	JIT, ROX1SJ680R			
4-1625885-3	NO		TYCROX1SJ220K	JIT, ROX1SJ220K			
4-1625885-4	NO			JIT, ROX1SJ220R			
4-1625885-7	NO		TYCROX1SJ22R	JIT, ROX1SJ22R			
5-1625885-5	NO		TYCROX1SJ2R2	JIT, ROX1SJ2R2			

Key Features

High Power with Small Size for Space Saving

Excellent Long Term Stability


Complete Flameproof Construction

Controlled Temperature Capability

Solvent Resistant Coat and Code

Special Lead Formations Possible

Type ROX Series



The resistive element comprises a metal oxide film deposited on a ceramic former. The element is protected by a flameproof coating which will withstand overload conditions without flame or mechanical damage. They are recommended for use in applications such as line protection etc

Characteristics – Electrical

Type	Rated Power @ 70°C	Max. Working Voltage	Max. Overload Voltage	Dielectric Withstand Voltage	Resistance Range Ω	Operating Temp. Range
Normal Size	ROX025	0.25W	250V	400V	250V	0.3 ~ 50K
	ROX05	0.5W	250V	400V	250V	0.3 ~ 330K
	ROX1	1W	350V	600V	350V	0.1 ~ 470K
	ROX2	2W	350V	600V	350V	0.1 ~ 560K
	ROX3	3W	500V	800V	500V	5.0 ~ 100K
	ROX5	5W	750V	1000V	750V	5.0 ~ 150K
	ROX7	7W	750V	1000V	750V	20 ~ 150K
	ROX8	8W	750V	1000V	750V	30 ~ 200K
	ROX9	9W	750V	1000V	750V	50 ~ 200K
Small Size	ROX05S	0.5W	250V	400V	250V	0.3 ~ 50K
	ROX1S	1W	350V	600V	350V	0.3 ~ 1MΩ
	ROX2S	2W	350V	600V	350V	0.3 ~ 1MΩ
	ROX3S	3W	350V	600V	350V	0.3 ~ 1MΩ
	ROX4S	4W	500V	800V	500V	5.0 ~ 100K
	ROX5SS	5W	500V	800V	500V	5.0 ~ 100K
	ROX5S	5W	500V	800V	500V	5.0 ~ 150K

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial line frequency and waveform corresponding to the power rating , as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Where : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt)

P = Power Rating (watt)

R = Nominal Resistance (ohm)

Rated Voltage = RCWV or Max. Working Voltage, whichever is smaller

Environmental Characteristics


Characteristics	Specification	Test Methods (JIS C 5201-1)	
DC. Resistance	Must be within the specified tolerance	5.1 The limit of error of measuring apparatus shall not exceed allowable range or 5% of resistance tolerance	
Temperature Coefficient	Range Ω	5.2 Natural resistance change per temp. degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^5 \text{ (PPM/}^\circ\text{C)}$ R ₁ : Resistance value at room temperature (t ₁) R ₂ : Resistance value at room temp. plus 100 °C (t ₂)	
	0.1 Ω ~ 12 Ω		± 200
	12.1 Ω ~ 100K		± 350
	101K ~ 1M		-700
	1.1M ~ 10M		-1500
Short time overload	Resistance change rate is Normal Size : $\pm (1\% + 0.05\Omega)$ Max. Small Size : $\pm (2\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV or the max. overload voltage respectively specified in the above list, whichever less for 5 seconds	
Dielectric Withstanding Voltage	No evidence of flashover mechanical damage, arcing or insulation break down	5.7 Resistors shall be clamped in the trough of a 90° metallic V-block and shall be tested at AC potential respectively specified in the electrical characteristics table for 60 + 10/ -0 seconds	
Terminal Strength	No Evidence of mechanical damage	6.1 Direct load: Resistance to a 2.5 kgs direct load for 10 secs. in the direction of the longitudinal axis of the terminal leads Twist test: Terminal leads shall be bent through 90° at point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.	
Resistance to soldering heat	Resistance change rate is: $\pm (1\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	6.4 Permanent resistance change when leads immersed to 3.2 mm to 4.8 mm from the body in 350°C \pm 10 °C solder for 3 \pm 0.5 seconds	
Solderability	95 % coverage Min.	6.5 The area covered with a new , smooth, clean , shiny and continuous surface free from concentrated pinholes. Test temp. of solder: 245°C \pm 3°C Dwell time in solder : 2 ~ 3 seconds	

Environmental Characteristics (continued)


Characteristics	Specification	Test Methods (JIS C 5201-1)															
Resistance to Solvent	No deterioration of protective coatings and marking	6.9 Specimens shall be immersed in a bath of trichroethane completely for 3 minutes with ultrasonic															
Temperature cycling	Resistance change rate is: $\pm (2\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	7.4 Resistance change after continuous 5 cycles for duty shown below:															
		<table border="1"> <thead> <tr> <th>Step</th> <th>Step</th> <th>Step</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>1</td> </tr> <tr> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>4</td> <td>4</td> <td>4</td> </tr> </tbody> </table>	Step	Step	Step	1	1	1	2	2	2	3	3	3	4	4	4
		Step	Step	Step													
		1	1	1													
		2	2	2													
3	3	3															
4	4	4															
Load life in humidity	<table border="1"> <thead> <tr> <th>Resistance Value</th> <th>$\Delta R/R$</th> </tr> </thead> <tbody> <tr> <td>Less than 100KΩ</td> <td>$\pm 5\%$</td> </tr> <tr> <td>100KΩ or more</td> <td>$\pm 10\%$</td> </tr> </tbody> </table>	Resistance Value	$\Delta R/R$	Less than 100K Ω	$\pm 5\%$	100K Ω or more	$\pm 10\%$	7.9 Resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") in a humidity test chamber controlled at $40\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$ and 90 to 95 % relative humidity									
	Resistance Value	$\Delta R/R$															
	Less than 100K Ω	$\pm 5\%$															
100K Ω or more	$\pm 10\%$																
Load life	<table border="1"> <thead> <tr> <th>Resistance Value</th> <th>$\Delta R/R$</th> </tr> </thead> <tbody> <tr> <td>Less than 100KΩ</td> <td>$\pm 5\%$</td> </tr> <tr> <td>100KΩ or more</td> <td>$\pm 10\%$</td> </tr> </tbody> </table>	Resistance Value	$\Delta R/R$	Less than 100K Ω	$\pm 5\%$	100K Ω or more	$\pm 10\%$	7.10 Permanent resistance change after 1,000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$ ambient									
	Resistance Value	$\Delta R/R$															
	Less than 100K Ω	$\pm 5\%$															
100K Ω or more	$\pm 10\%$																
Pulse overload	Resistance change rate is: Normal Size : $\pm (2\% + 0.05\Omega)$ Max. Small Size : $\pm (5\% + 0.05\Omega)$ Max. with no evidence of mechanical damage	5.8 Resistance change after 10,000 cycles (1 second "on", 25 seconds "off") at 4 times RCWV or the max. pulse overload voltage															

Derating:

In ambient temperatures greater than $70\text{ }^\circ\text{C}$ the load shall de-rate as shown in the graph below:

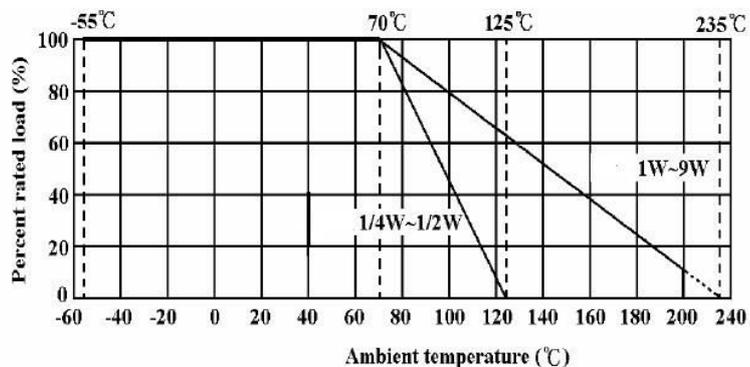


Construction:



No.	Name	Material
1	Basic Body	Rod Type Ceramics
2	Resistance Film	0.1Ω ≤ R ≤ 12Ω : CNP film For All Wattage
		12.1Ω ≤ R ≤ 100KΩ : Metal oxide film For 1/2W-S, 1/4W
		R > 100KΩ : Carbon film For 1/2W, 1W-S
		12.1Ω ≤ R ≤ 120KΩ : Metal oxide film For 1W, 2W-S, 2W, 3W-S, 3W, 4W-S, 5W-SS
		R > 120KΩ : Carbon film (For 5W, 5W-S)
		12.1Ω ≤ R ≤ 150KΩ : Metal oxide film For 7W, 8W, 9W
		R > 150KΩ : Carbon film
		12.1Ω ≤ R ≤ 180KΩ : Metal oxide film (For 7W, 8W, 9W)
12.1Ω ≤ R ≤ 200KΩ : Metal oxide film		
3	End Cap	Steel (Tin plated iron surface)
4	Lead Wire	Annealed copper wire coated with tin
5	Joint	By welding
6	Coating	Normal size --Insulated & Non-Flame Paint (Color : Gray) Small size --Insulated & Non-Flame Paint (Color : Sea-Blue)
7	Color Code	Non-Flame epoxy resin


Dimensions:



Type	Dimensions (MM)				
	D (max.)	L (max.)	d ±0.05	H ±3	
Normal Size	ROX025	2.5	7.5	0.54	28
	ROX05	3.5	10	0.70	28
	ROX1	5	12	0.70	25
	ROX2	5.5	16	0.70	28
	ROX3	6.5	17.5	0.75	28
	ROX5	8.5	26	0.75	38
	ROX7	8.5	32	0.75	38
	ROX8	8.5	41	0.75	38
	ROX9	8.5	54	0.75	38
Small Size	ROX05S	2.5	7.5	0.54	28
	ROX1S	3.5	10	0.70	28
	ROX2S	5	12	0.70	25
	ROX3S	5.5	16	0.70	28
	ROX4S	6.5	17.5	0.75	28
	ROX5SS	6.5	17.5	0.75	28
	ROX5S	8	25	0.75	38


Painting method:

Welding point, terminal and lead wire, is permissible to be exposed without the outer coated cover. The extent should be within $\frac{1}{2}$ of the resistor body diameter.

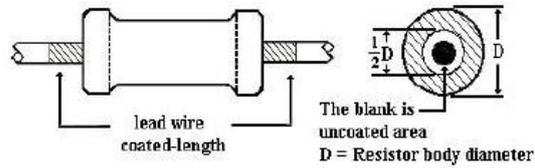


Marking:

For 1/4W, 1/2W, 1W, 2W, 3W, 4W, 5W and all of small size Resistors shall be marked with color coding. colors shall be in accordance with JIS C 0802

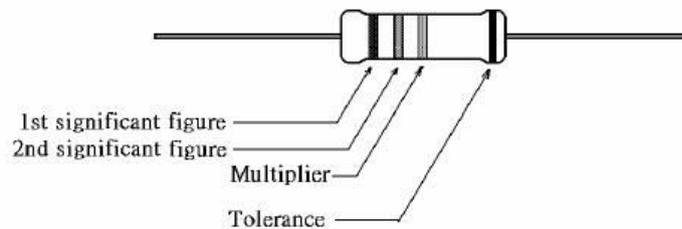

For 7W, 8W, 9W marking shall be in text format:

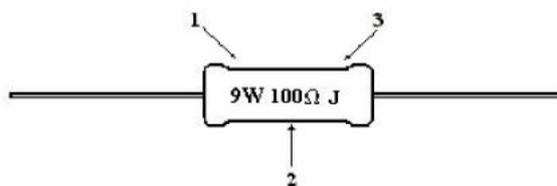

Code description and regulation

1. Wattage rating.
2. Nominal resistance value.
3. Resistance Tolerance.


G: $\pm 2\%$

J: $\pm 5\%$

K: $\pm 10\%$


Packing Specification:

Taping:

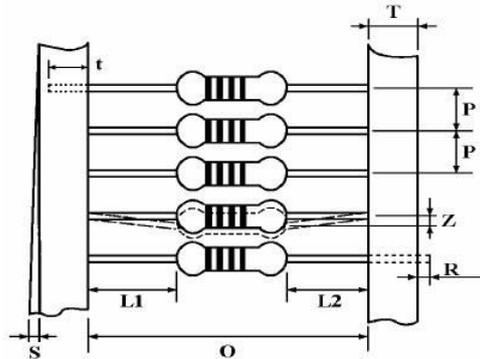

	Type	Style	O±1	P	L1-L2	T	Z	R	t	S
Normal Size	ROX025	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX05	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX1	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX2	PT-64	64	10±0.5	1 Max	6±1	1 Max	0	5±1	0.5 max
Small Size	ROX3	PT-64	64	10±0.5	1 Max	6±1	1 Max	0	5±1	0.5 max
	ROX05S	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX1S	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX2S	PT-52	52	5±0.3	1 Max	6±1	1 Max	0	4±1	0.5 max
	ROX3S	PT-64	64	10±0.5	1 Max	6±1	1 Max	0	5±1	0.5 max
	ROX4S	PT-64	64	10±0.5	1 Max	6±1	1 Max	0	5±1	0.5 max
	ROX5SS	PT-64	64	10±0.5	1 Max	6±1	1 Max	0	5±1	0.5 max


Tape in box packing (Ammopack):

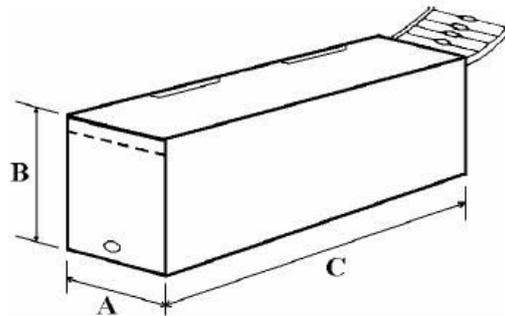

Type	C ± 5	A ± 5	B ± 5	Pack Quantity
ROX025	250	75	96	5000
ROX05	260	85	70	1000
ROX1	262	86	80	1000
ROX2	262	92	108	1000
ROX3	256	92	80	500
ROX05S	250	75	96	5000
ROX1S	260	85	70	1000
ROX2S	262	86	80	1000
ROX3S	262	92	108	1000
ROX4S	256	92	80	500
ROX5SS	256	92	80	500


NB Certain products can be supplied reeled on request.

Plastic cases in box:

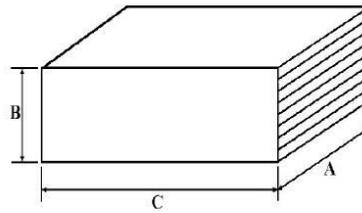


Type	C ±5	A ±5	B ±5	Quantity	
				Plastic Case	Box
ROX5S	36	20	8	100	1000
ROX5	36	20	8	100	1000

Bulk packaging (plastic bag in inner box):



Inner Box of Plastic bag.



Carton Box

Type	Qty/Bag (Pcs)	Qty/Box (Pcs)	Qty/Carton Pcs	Box size LxWxH (±5)	Carton size LxWxH (±5)	Gross wt ±2 Kgs
ROX7	8	32	1600	150 x 75 x 33	432 x 308 x 215	9.5
ROX8	8	32	1600	150 x 75 x 33	432 x 308 x 215	11.5
ROX9	10	300	1800	200 x 171 x 113	520 x 215 x 250	15

How To Order

ROX	1S	J	100K		
Common Part	Power Rating		Tolerance	Resistance Value	Special Request
ROX – Flame proof power metal oxide film resistor	Normal size	Small size	G – 2% J – 5%	R33 -0.33Ω 1R0 - 1Ω 10R - 10Ω 100R - 100Ω 1K0 – 1KΩ (1000Ω) 100K – 100KΩ (100,000Ω)	BL * – Pre-formed Leads TR - Reeled
	025 - 1/4W	05S – 1/2W			
	05 – 1/2W	1S – 1W			
	1 – 1W	2S – 2W			
	2 – 2W	3S – 3W			
	3 – 3W	4S – 4W			
	5 – 5W	5SS – 5W			
	7 – 7W	5S – 5W			
	8 – 8W				
	9 – 9W				