


## Surface Mount Ultrafast Plastic Rectifier



DO-214AA (SMB)

### MAJOR RATINGS AND CHARACTERISTICS

|                    |              |
|--------------------|--------------|
| $I_{F(AV)}$        | 1.0 A        |
| $V_{RRM}$          | 400 V, 600 V |
| $I_{FSM}$          | 35 A         |
| $t_{rr}$           | 50 ns        |
| $V_F$              | 1.05 V       |
| $T_j \text{ max.}$ | 175 °C       |

### FEATURES

- Glass passivated chip junction
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020C, LF max peak of 260 °C
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

For use in high frequency rectification and free-wheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

### MECHANICAL DATA

**Case:** DO-214AA (SMB)

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** Color band denotes cathode end

### MAXIMUM RATINGS ( $T_A = 25\text{ °C}$ unless otherwise noted)

| PARAMETER  | SYMBOL         | MURS140  | MURS160 | UNIT |
|--|----------------|--|---------|------|
| Device marking code  |                | MG   | MJ      |      |
| Maximum repetitive peak reverse voltage  | $V_{RRM}$      | 400  | 600     | V    |
| Working peak reverse voltage   | $V_{RWM}$      | 400  | 600     | V    |
| Maximum DC blocking voltage  | $V_{DC}$       | 400  | 600     | V    |
| Maximum average forward rectified current at (see Fig. 1)                          | $I_{F(AV)}$    | $T_L = 150\text{ °C}$<br>$T_L = 125\text{ °C}$ |         | A    |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load | $I_{FSM}$      | 35   |         | A    |
| Operating junction and storage temperature range                                   | $T_J, T_{STG}$ | - 65 to + 175                                  |         | °C   |



| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) |   |   |          |              |               |
|--|---|---|----------|--------------|---------------|
| PARAMETER  | TEST CONDITIONS   | SYMBOL  | MURS140  | MURS160      | UNIT          |
| Maximum instantaneous forward voltage <sup>(1)</sup>   | at $I_F = 1.0\text{ A}$ ,<br>at $I_F = 1.0\text{ A}$ ,  | $T_j = 25\text{ }^\circ\text{C}$<br>$T_j = 150\text{ }^\circ\text{C}$ | $V_F$    | 1.25<br>1.05 | V             |
| Maximum instantaneous reverse current at rated DC blocking voltage <sup>(1)</sup>            |   | $T_j = 25\text{ }^\circ\text{C}$<br>$T_j = 150\text{ }^\circ\text{C}$ | $I_R$    | 5.0<br>150   | $\mu\text{A}$ |
| Maximum reverse recovery time  | at $I_F = 0.5\text{ A}$ , $I_R = 1.0\text{ A}$ , $I_{rr} = 0.25\text{ A}$                                       |   | $t_{rr}$ | 50           | ns            |
| Maximum reverse recovery time  | at $I_F = 1.0\text{ A}$ , $di/dt = 50\text{ A}/\mu\text{s}$ , $V_R = 30\text{ V}$ , $I_{rr} = 10\%$<br>$I_{RM}$ |   | $t_{rr}$ | 75           | ns            |
| Maximum forward recovery time  | at $I_F = 1.0\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ , recovery to $1.0\text{ V}$                       |   | $t_{fr}$ | 50           | ns            |

**Note:**

(1) Pulse test:  $t_p = 300\text{ }\mu\text{s}$  pulse, duty cycle  $\leq 2\%$

| <b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) |                 |         |         |      |
|---|-----------------|---------|---------|------|
| PARAMETER   | SYMBOL          | MURS140 | MURS160 | UNIT |
| Typical thermal resistance junction to ambient  | $R_{\theta JL}$ | 13      |         | C/W  |

| <b>ORDERING INFORMATION</b> |                 |                        |               |                                  |
|-----------------------------|-----------------|------------------------|---------------|----------------------------------|
| PREFERRED P/N               | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE                    |
| MURS160-E3/52T              | 0.096           | 52T                    | 750           | 7" Diameter Plastic Tape & Reel  |
| MURS160-E3/5BT              | 0.096           | 5BT                    | 3200          | 13" Diameter Plastic Tape & Reel |

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

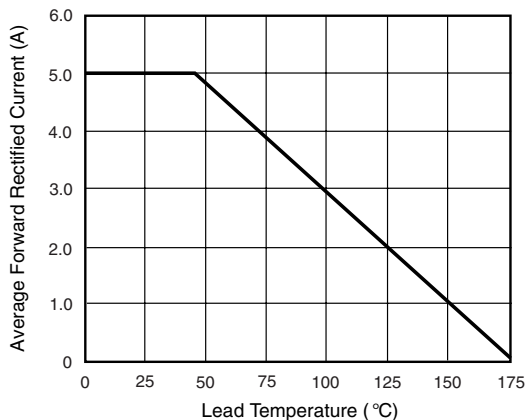


Figure 1. Forward Current Derating Curve

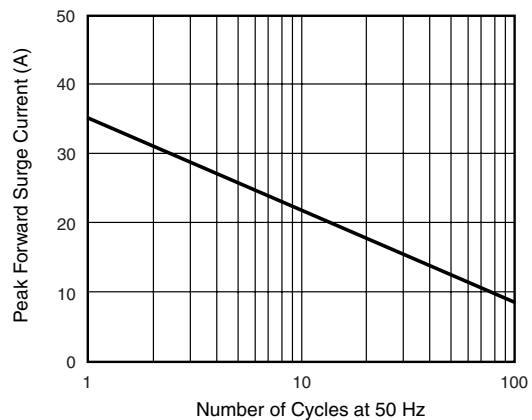


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

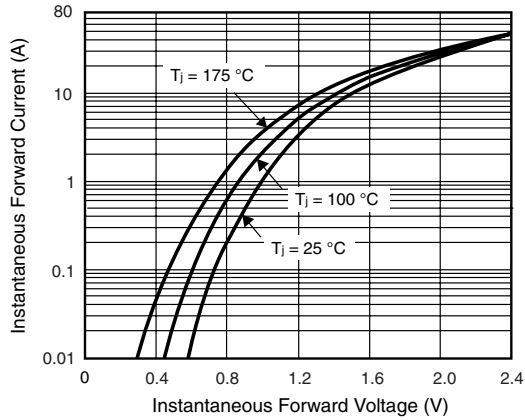


Figure 3. Typical Instantaneous Forward Characteristics

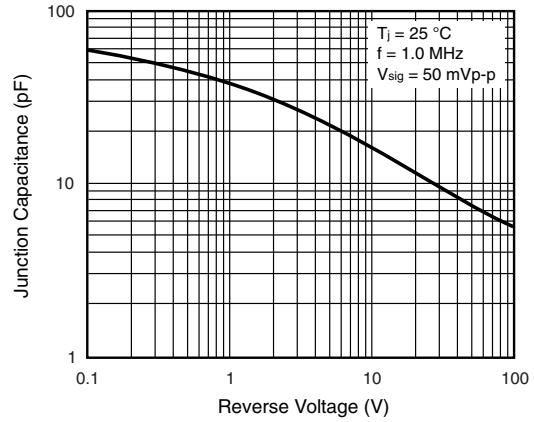


Figure 5. Typical Junction Capacitance


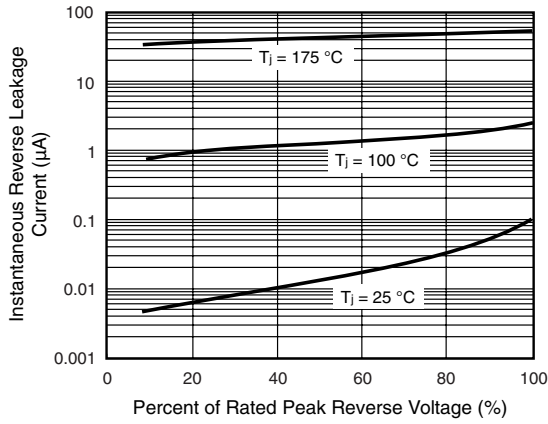


Figure 4. Typical Reverse Leakage Characteristics

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



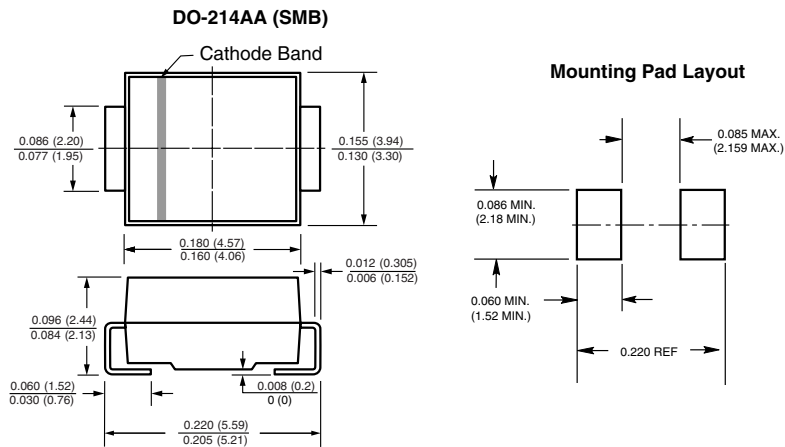

## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.