



## Dimafix Pen




**Dimafix Pen** (90ml) is a new product based on Dimafix formula. Maintains the same adhesion properties of Dimafix spray format but in dabber liquid format. It has long been useful (more than 100 uses). It is water soluble so it is easy to clean. It works on different temperature range than Dimafix gas, so it allows the self dettaching effect of the piece sooner. This product does not contain any gas, is enviromentally friendly. You can also notice it great smell during the print. After you use it, close it and hold it properly.

**Please Note** - Due to restrictions on pressurised containers, this product is only available to mainland UK customers.

# dimafix®

Recommendations for printing with Dimafix® - Use zones

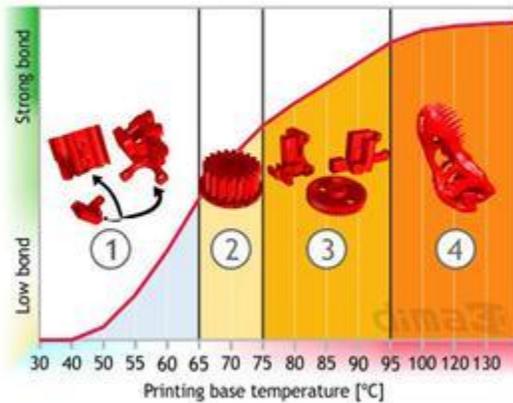

①	↓ 149°F (↓ 65°C)	Zone of self-detach for the printed pieces. Very weak adherence.
②	149°F ↔ 167°F (65°C ↔ 75°C)	Zone of average adherence. Recommended for simple geometries.
③	167°F ↔ 203°F (75°C ↔ 95°C)	Zone of high adherence. Recommended for complex geometries and long-lasting prints.
④	↑ 203°F (↑ 95°C)	Zone of very high adherence. Recommended for very complex geometries and bulky pieces. Reliability for very long-lasting prints.

 Make sure the base is cold

 Apply it over the base



 Wait a few seconds for the surface to dry and heat the bed

 Consult the table with recommended temperatures for printing each Dimafix formula

 The product begins to work above 65°C/150°F

