
OMRON

Light Convergent Reflective Sensor **B5W-LB**



Reliable Detection of Shiny, Black or Transparent Objects

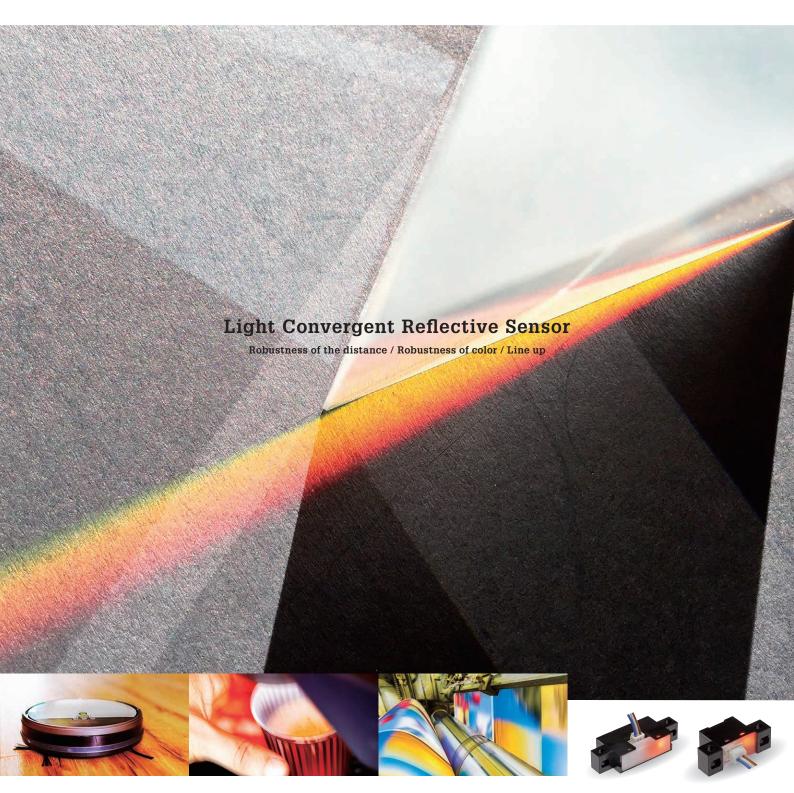

Reliable Detection of Shiny, Black or Transparent Objects

Light Convergent Reflective sensor for embedding in 24 VDC equipment

A series of types with indicator lamps showing the sensor's operating statuses have also been added





Lighting status of indicator lamp types



B5W-LB2

Sensing distance: 10 to 55 mm



B5W-LB1

Sensing distance: 2 to 10 mm



Applications

Container detection



Analysis equipment

Printed paper detection




Printing equipment

Tablet package detection



Tablet packagers



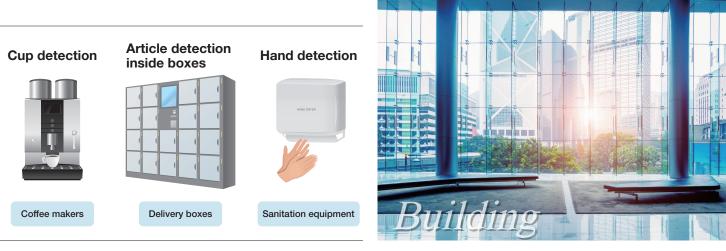

Robustness of color

Stable detection for of shiny, black or transparent objects

Past problem

Sensing of shiny, black or transparent objects was unstable, requiring more man-hours for development and production processes.

Solution!


With OMRON's Light Convergent
Reflective Sensors, unstable sensing of
shiny, black or transparent objects is no
longer a problem, meaning less man-hours!
Contributing to reduction of man-hours.




Here's why

Light Convergent Reflective Sensor Principles

The presence of an object is detected by the received light reflected off a sensed object. The sensor's optical system has a limited projection beam and light sensing area, so the system is capable of sensing objects only within a specific distance from the sensor (the range in which the projection beam and the light sensing area overlap).

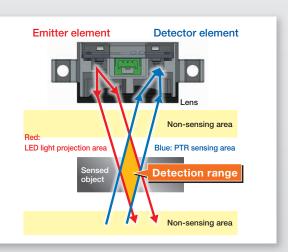

Unaffected by backgrounds, meaning only the intended object is sensed accurately.

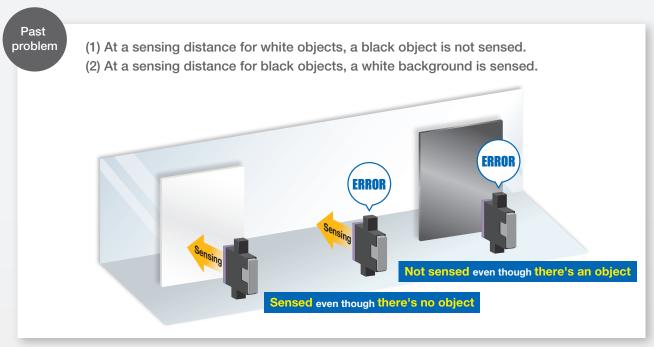



Robustness of the distance

A wide sensing range to allow object shifting




Past problem

Sensing was not possible due to object shifting.

Answer!

A wider sensing range has been realized through the use of four types of toroidal lenses. Sensing is even possible in the case of object shifting.

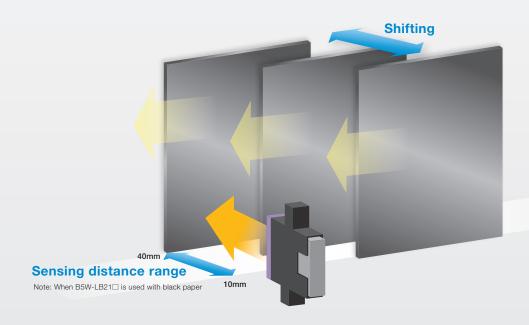




Optical simulations were used in the design of these lenses to provide robustness in terms of both color and distance. Lens design using optical simulation.



The low levels of light reflected off shiny, black or transparent objects made detection unstable.




OMRON's unique structure uses four types of toroidal lenses to enable stable sensing, even at minimal light levels.



Patent pending

Line up

Suitable for embedding in commercial equipment

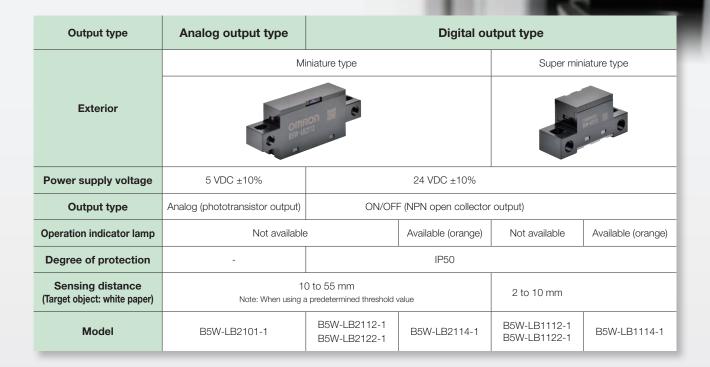

24 VDC

We also have a lineup of noise-resistant 24V models ideal for commercial equipment and models with indicator lamp.

Connects easily


An ON/OFF output that enables direct connections to control equipment such as PLCs.

Environmental resistance

IP50 for use in a wide range of applications, including heavy dust. Note: Only digital output type

Performance comparison with conventional sensors

Capable of sensing workpieces of various colors over a wide sensing range

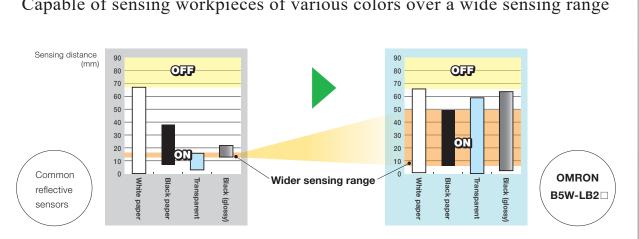

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas

https://components.omron.com/us

Asia-Pacific

https://components.omron.com/ap

https://components.omron.com/kr

Europe

https://components.omron.com/eu

China

https://components.omron.com.cn

Japan

https://components.omron.com/jp